



BT-TXER

ER Collet Chuck_ER 콜릿척

MAS
403-BT

Shank

C

Coolant System

Ø20

Max Dia



Milling




Drilling



Chamfering



Tapping

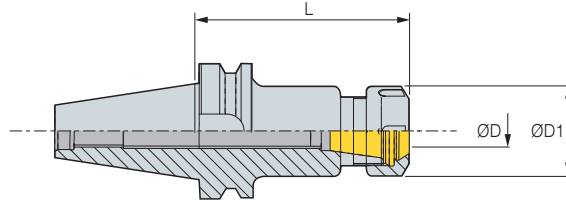

● 표시 : 재고관리품

C 내부 콜릿 시스템은 옵션 탑재가 가능합니다.

	형번	ØD	L	ØD1	Collet	사용너트 Fig.	포장 무게(kg)	Stock
BT30	BT30-TXER16-70	1.0-10.0	70	28	ER16	1	0.7	●
	BT30-TXER16-100	1.0-10.0	100	28	ER16		0.7	●
	BT30-TXER20-70	1.0-13.0	70	34	ER20		0.7	●
	BT30-TXER20-100	1.0-13.0	100	34	ER20		0.9	●
	BT30-TXER25-70	2.0-16.0	70	42	ER25	2	0.8	●
	BT30-TXER25-100	2.0-16.0	100	42	ER25		0.9	●
	BT30-TXER32-70	2.0-20.0	70	50	ER32		0.8	●
	BT30-TXER32-100	2.0-20.0	100	50	ER32		1.0	●
BT40	BT40-TXER16-70	1.0-10.0	70	28	ER16	1	1.2	●
	BT40-TXER16-100	1.0-10.0	100	28	ER16		1.3	●
	BT40-TXER16-160	1.0-10.0	160	28	ER16		1.5	●
	BT40-TXER20-70	1.0-13.0	70	34	ER20		1.2	●
	BT40-TXER20-100	1.0-13.0	100	34	ER20		1.4	●
	BT40-TXER20-160	1.0-13.0	160	34	ER20		1.8	●
	BT40-TXER25-70	2.0-16.0	70	42	ER25	2	1.3	●
	BT40-TXER25-100	2.0-16.0	100	42	ER25		1.4	●
	BT40-TXER25-130	2.0-16.0	130	42	ER25		1.6	●
	BT40-TXER25-160	2.0-16.0	160	42	ER25		2.0	●
	BT40-TXER32-70	2.0-20.0	70	50	ER32		1.4	●
	BT40-TXER32-100	2.0-20.0	100	50	ER32		1.7	●
	BT40-TXER32-130	2.0-20.0	130	50	ER32		2.0	●
	BT40-TXER32-160	2.0-20.0	160	50	ER32		2.5	●
BT50	BT50-TXER16-100	1.0-10.0	100	28	ER16	1	3.8	●
	BT50-TXER16-160	1.0-10.0	160	28	ER16		4.1	●
	BT50-TXER20-100	1.0-13.0	100	34	ER20		3.9	●
	BT50-TXER20-160	1.0-13.0	160	34	ER20		4.5	●
	BT50-TXER25-100	2.0-16.0	100	42	ER25	2	3.9	●
	BT50-TXER25-130	2.0-16.0	100	42	ER25		4.2	●
	BT50-TXER25-160	2.0-16.0	160	42	ER25		4.6	●
	BT50-TXER32-100	2.0-20.0	100	50	ER32		4.1	●
	BT50-TXER32-130	2.0-20.0	130	50	ER32		4.5	●
	BT50-TXER32-160	2.0-20.0	160	50	ER32		4.9	●

(단위 : mm)

형번	ØC	L	G	Fig.
ER16-DIN6499	28	17.5	M22X1.5	1
ER20-DIN6499	34	19	M25X1.5	1
ER25-DIN6499	42	20	M32X1.5	2
ER32-DIN6499	50	22.5	M40X1.5	2

(단위 : mm)

Fig.1




Fig.2

