

1:1 문의하기



Precision Micro Adjusting Cartridge

Precision Micro Adjusting Cartridge_정밀 보링 조절 카트리리지




Boring



특징

- 좌/우승수 버전 모두 제공 가능, 내부쿨러트 타입
- 최소 가공경 28.00mm부터 제공
- 90도, 95도 리드각 버전
- 반경 방향 조정 0.3mm 범위 이내에서 0.01mm 단위로 직경 조정 (1눈금 조정 반경 0.005mm)
- 축 방향 조정 범위 1.0mm

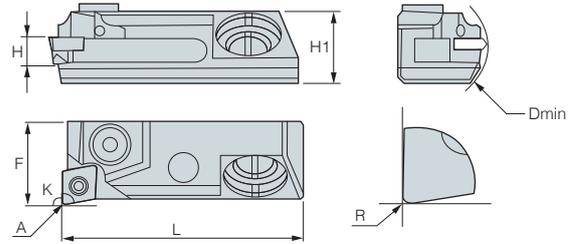

형번	K	H	F	L	H1	Dmin	R	적용 인서트	포장 무게(kg)	Stock
TMCR90-F16-CC06	90°	8.8	16	45.8	13.5	28	0.4	CC..0602..	1	●
TMCL90-F16-CC06	90°	8.8	16	45.8	13.5	28	0.4	CC..0602..	1	
TMCR95-F16-CC06	95°	8.8	16	45.8	13.5	28	0.4	CC..0602..	1	
TMCL95-F16-CC06	95°	8.8	16	45.8	13.5	28	0.4	CC..0602..	1	●
TMCR90-F16-TP09	90°	8.8	16	45.8	13.5	28	0.4	TP..0902..	1	●
TMCL90-F16-TP09	90°	8.8	16	45.8	13.5	28	0.4	TP..0902..	1	
TMCR/L95-F16-TP09	95°	8.8	16	45.8	13.5	28	0.4	TP..0902..	1	
TMCR90-F20-TC11	90°	8.8	20	45.8	13.5	36	0.4	TC..1102..	1	●
TMCL90-F20-TC11	90°	8.8	20	45.8	13.5	36	0.4	TC..1102..	1	
TMCR/L95-F20-TC11	95°	8.8	20	45.8	13.5	36	0.4	TC..1102..	1	
TMCR/L90-F20-TP11	90°	8.8	20	45.8	13.5	36	0.4	TP..1103..	1	
TMCR/L95-F20-TP11	95°	8.8	20	45.8	13.5	36	0.4	TP..1103..	1	
TMCR90-F22-CC09	90°	7.5	22	54.8	17.0	34	0.4	CC..09	1	
TMCR120-F16-DC07	120°	5.0	16	48.6	13.5	34	0.4	DC..07	1	

(단위 : mm)

1:1 문의하기




PSBW

Pull Stud Bolt Wrench_풀 스테드 볼트 렌치



특징

- 각 규격 풀 스테드 볼트와 완벽한 호환성
- 견고한 디자인
- 조절 스패너 사용 없이 편리하게 풀 스테드 볼트 체결 및 분해 가능

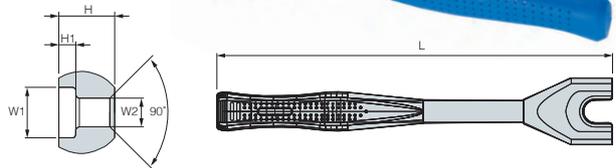

형번	L	H	H1	W1	W2	토크(N·m)	포장 무게(kg)	Stock
PSBW-30	210	16	5	13	7	≤80	0.5	●
PSBW-40	230	25	6	19	10	≤150	0.5	●
PSBW-50	280	33	10	30	17	≤280	1	●
PSBW-40(PS-805)	230	20.5	7	19	14	≤150	0.5	●
PSBW-40(PS-G51)	240	13	5	19	13	≤150	0.5	●
PSBW-50(PS-G41)	290	17	8	30	21	≤280	1	●

(단위 : mm)