



GH O링, 스냅링



GO GS

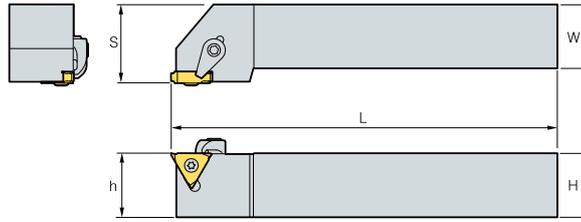

본도는 우수수(R)를 도시했음

(mm)

형번	재고		H=(h)	W	L	S	적용인서트	클램프	클램프스크류	스크류	렌치
	R	L									
GH	2020R/L-3	●	20	20	125	22	GS125~280	CS6R1	DHA0617	PTMA03508	TW09P-HW30L
	2525R/L-3	●	25	25	150	27	GO250				
	2020R/L-4	●	20	20	125	21	GS330 / 430				
	2525R/L-4	●	25	25	150	26	GO320 / 410				

적용인서트

적용인서트 C53 ● : 재고 관리 형번



용도	형상	형번	코팅			초경			치수 (mm)					형상도면
			NC3010	NC3120	NC3225	H01	ST20E	A30	b	g	W	r	d	
(브레이크 · 펌프 · 밸브 · 파이프) 앵글링	GO	250							2.5	1.5	3.3	0.35	9.525	
		320						3.2	2.0	3.8	0.35	9.525		
		410						4.1	2.5	4.5	0.65	9.525		
	GS	125					●		1.23	1.5	2.5	0.2	9.525	
		145					●		1.43	1.5	2.5	0.2	9.525	
		175					●		1.73	2.0	2.5	0.2	9.525	
		185					●		1.83	2.0	2.5	0.2	9.525	
		200					●		2.03	2.5	2.5	0.2	9.525	
		230					●		2.28	3.5	2.8	0.2	9.525	
		280					●		2.78	3.5	3.3	0.3	9.525	
330							3.28	4.0	3.8	0.3	9.525			
430							4.28	4.0	4.5	0.4	9.525			

● : 재고 관리 형번

GFIK 릴리프용



GR

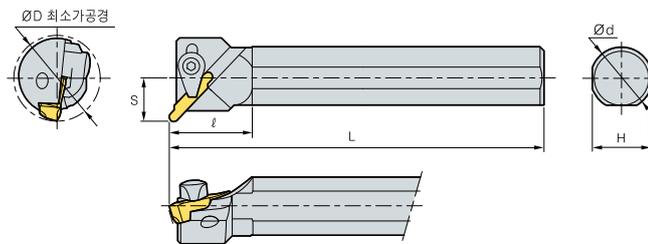

본도는 우수수(R)를 도시했음

(mm)

형번	재고		ØD	Ød	H	L	l	S	적용인서트	클램프	C링	스크류	핀	렌치						
	R	L																		
GFIK	316R/L		22	16	15	150	21.5	11	GR3□□	CH5R2	CR04	CHX0513	PN0310	HW25L						
	325R/L		32	25	23	200	21.5	17												
	340R/L		50	40	37	300	35.4	27												
	525R/L		32	25	23	200	27.5	17												
	540R/L		50	40	37	300	39.5	27	GR5□□	CS6R1	-	DHA0617	PN0314	HW30L						
	840R/L		50	40	37	300	41.8	27												
															GR8□□	CS8R1	-	DHA0820	PN0314	HW40L

적용인서트 C53 ● : 재고 관리 형번

적용인서트

용도	형상	형번	코팅			초경			치수 (mm)						형상도면
			NC3010	NC3120	NC3225	H01	ST20E	A30	b	g	W	l	t	r	
릴리프용 앵글		GR 310R							2.0	2.0	3.1	15.9	5.0	1.0	
		315R							3.0	2.9	3.1	15.9	5.0	1.5	
		520R							4.0	4.0	5.1	21.9	6.0	2.0	
		525R							5.0	5.0	5.1	21.8	6.0	2.5	
		830R							6.0	6.0	8.1	26.8	7.0	3.0	
		840R							8.0	8.0	8.1	26.7	7.0	4.0	

● : 재고 관리 형번