


KED Plus Drill(4D)

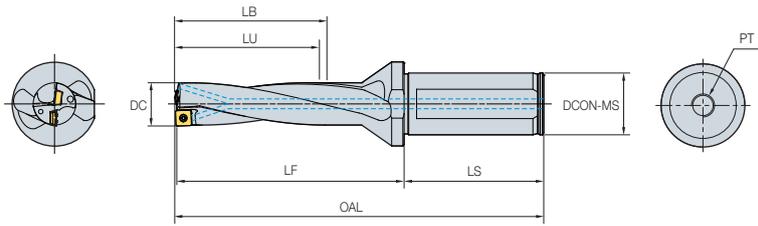


형 번		재고	DC	DCON-MS	LU	LF	LB	LS	OAL	PT	적용인서트	스크류	렌 치
E4D-	12020-04-P*	●	12	20	48	64.71	51	50	115	1/8	SP□T040204-□□ XO□T040204-□□	FTNA0204	TW06P
	12520-04-P	●	12.5	20	48	64.71	51	50	115				
	13020-04-P	●	13	20	52	68.71	55	50	119				
	13520-04-P*	●	13.5	20	52	68.71	55	50	119				
	14020-05-P*	●	14	20	56	73.6	59	50	124				
	14520-05-P*	●	14.5	20	56	73.6	59	50	124				
	15020-05-P	●	15	20	60	78.6	63	50	129				
	15520-05-P*	●	15.5	20	60	78.5	63	50	129				
	16020-05-P	●	16	20	64	82.5	67	50	133				
	16525-06-P*	●	16.5	25	64	82.6	67	56	139				
	17025-06-P	●	17	25	68	86.6	71	56	143				
	17525-06-P*	●	17.5	25	68	86.5	71	56	143				
	18025-06-P	●	18	25	72	91.5	75	56	148				
	18525-06-P	●	18.5	25	72	91.5	75	56	148				
	19025-06-P	●	19	25	76	95.4	79	56	152				
	19525-06-P*	●	19.5	25	76	95.4	79	56	152				
	20025-07-P	●	20	25	80	101.5	83	56	158				
	20525-07-P	●	20.5	25	80	101.4	83	56	158				
	21025-07-P*	●	21	25	84	105.4	87	56	162				
	21525-07-P	●	21.5	25	84	105.4	87	56	162				
	22025-07-P	●	22	25	88	109.4	91	56	166				
	22525-07-P	●	22.5	25	88	109.3	91	56	166				
	23025-07-P	●	23	25	92	115.3	95	56	172				
	23525-07-P	●	23.5	25	92	115.3	95	56	172				
	24032-09-P*	●	24	32	96	120.4	99	60	181				
	24532-09-P	●	24.5	32	96	120.4	99	60	181				
	25032-09-P	●	25	32	100	124.3	103	60	185				
	25532-09-P	●	25.5	32	100	124.3	103	60	185				
	26032-09-P	●	26	32	104	128.3	107	60	189				
	26532-09-P*	●	26.5	32	104	128.3	107	60	189				
	27032-09-P	●	27	32	108	133.2	111	60	194				
	27532-09-P	●	27.5	32	108	133.2	111	60	194				
	28032-09-P	●	28	32	112	138.2	115	60	199				
	28532-09-P	●	28.5	32	112	138.2	115	60	199				
	29032-09-P	●	29	32	116	142.1	119	60	203				
29532-09-P*	●	29.5	32	116	142.1	119	60	203					
30032-11-P	●	30	32	120	149	123	60	210					
30532-11-P		30.5	32	120	149	123	60	210					
31032-11-P	●	31	32	124	153	127	60	214					
31532-11-P		31.5	32	124	153	127	60	214					
32032-11-P*	●	32	32	128	157	131	60	218					
32532-11-P		32.5	32	128	157	131	60	218					
33032-11-P	●	33	32	132	162	135	60	223					
33532-11-P		33.5	32	132	162	135	60	223					
34032-11-P	●	34	32	136	166	139	60	227					
34532-11-P		34.5	32	136	165.9	139	60	227					
35032-11-P*	●	35	32	140	169.9	143	60	231					
35532-11-P		35.5	32	140	169.9	143	60	231					
									1/4	SP□T090308-□□ XO□T090305-□□	FTKA0307	TW09S	
										SP□T11T308-□□ XO□T11T306-□□	FTKA03508	TW15S	

적용인서트 D9 ~ D10

*는 Tap 기초홀 가공용으로 사용가능함(참조 D7page)

KED Plus Drill(4D)

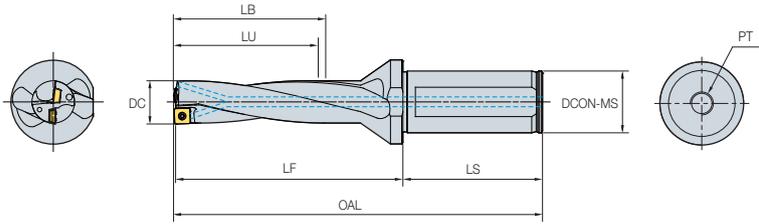

												(mm)	
형 번	재고	DC	DCON-MS	LU	LF	LB	LS	OAL	PT	적용인서트	스crew	렌치	
E4D-	36040-13-P	●	36	40	144	177.1	148	70	248	1/4	SP□T130410-□□ XO□T130406-□□	FTKA0410 TW15S	
	36540-13-P		36.5	40	144	177	148	70	248				
	37040-13-P	●	37	40	148	181	152	70	252				
	37540-13-P*		37.5	40	148	181	152	70	252				
	38040-13-P	●	38	40	152	185.9	156	70	257				
	38540-13-P		38.5	40	152	185.9	156	70	257				
	39040-13-P	●	39	40	156	189.9	160	70	261				
	39540-13-P		39.5	40	156	189.9	160	70	261				
	40040-13-P	●	40	40	160	194.8	164	70	266				
	40540-13-P		40.5	40	160	194.8	164	70	266				
	41040-13-P	●	41	40	164	198.8	168	70	270				
	41540-13-P		41.5	40	164	198.8	168	70	270				
	42040-13-P	●	42	40	168	212.7	172	70	284				
	42540-13-P		42.5	40	168	212.7	172	70	284				
	43040-15-P	●	43	40	172	210.8	177	70	282				
	43540-15-P		43.5	40	172	210.8	177	70	282				
	44040-15-P	●	44	40	176	214.8	181	70	286				
	44540-15-P		44.5	40	176	214.7	181	70	286				
	45040-15-P	●	45	40	180	219.7	185	70	291				
	45540-15-P		45.5	40	180	219.7	185	70	291				
	46040-15-P	●	46	40	184	223.7	189	70	295				
	46540-15-P		46.5	40	184	223.6	189	70	295				
	47040-15-P	●	47	40	188	228.6	193	70	300				
	47540-15-P		47.5	40	188	228.6	193	70	300				
	48040-15-P	●	48	40	192	232.6	197	70	304				
	48540-15-P		48.5	40	192	232.5	197	70	304				
	49040-15-P	●	49	40	196	236.5	201	70	308				
	49540-15-P		49.5	40	196	236.5	201	70	308				
	50040-15-P	●	50	40	200	240.5	205	70	312				
	50540-15-P		50.5	40	200	240.5	205	70	312				
	51040-18-P	●	51	40	204	248.6	210	70	320				
	51540-18-P		51.5	40	204	248.6	210	70	320				
	52040-18-P	●	52	40	208	252.6	214	70	324				
	52540-18-P		52.5	40	208	252.5	214	70	324				
	53040-18-P	●	53	40	212	256.5	218	70	328				
	53540-18-P		53.5	40	212	256.5	218	70	328				
54040-18-P	●	54	40	216	260.4	222	70	332					
54540-18-P		54.5	40	216	260.4	222	70	332					
55040-18-P	●	55	40	220	264.4	226	70	336					
55540-18-P		55.5	40	220	264.4	226	70	336					
56040-18-P	●	56	40	224	270.3	230	70	342					
56540-18-P		56.5	40	224	270.3	230	70	342					
57040-18-P	●	57	40	228	275.3	235	70	347					
57540-18-P		57.5	40	228	275.3	235	70	347					
58040-18-P	●	58	40	232	280.2	240	70	352					
58540-18-P		58.5	40	232	280.2	240	70	352					
59040-18-P	●	59	40	236	285.2	245	70	357					
59540-18-P		59.5	40	236	285.2	245	70	357					
60040-18-P	●	60	40	240	290.2	250	70	362					
60540-18-P		60.5	40	240	290.2	250	70	362					
										SP□T15M510-□□ XO□T15M508-□□	FTNC04511 TW20S		
												SP□T180510-□□ XO□T180508-□□	FTNA0511 TW20-100

➔ 적용인서트 D9 ~ D10

*는 Tap 기초홀 가공용으로 사용가능함(참조 D7page)