


KED Plus Drill(2D)

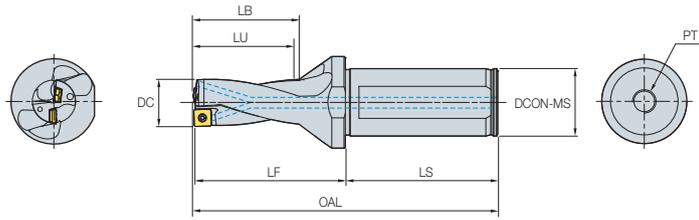


											(mm)	
형번	재고	DC	DCON-MS	LU	LF	LB	LS	OAL	PT	적용인서트	스크류	렌치
E2D-	12020-04-P*	●	12	20	24	40.71	27	50	91	1/8	SP□T040204-□□ XO□T040204-□□	FTNA0204 TW06P
	12520-04-P		12.5	20	24	40.71	27	50	91			
	13020-04-P	●	13	20	26	42.71	29	50	93			
	13520-04-P*	●	13.5	20	26	42.71	29	50	93			
	14020-05-P*	●	14	20	28	45.6	31	50	96			
	14520-05-P*	●	14.5	20	28	45.6	31	50	96			
	15020-05-P	●	15	20	30	48.6	33	50	99			
	15520-05-P*	●	15.5	20	30	48.5	33	50	99			
	16020-05-P	●	16	20	32	50.5	35	50	101			
	16525-06-P*	●	16.5	25	32	50.6	35	56	107			
	17025-06-P	●	17	25	34	52.6	37	56	109			
	17525-06-P*	●	17.5	25	34	52.5	37	56	109			
	18025-06-P	●	18	25	36	55.5	39	56	112			
	18525-06-P	●	18.5	25	36	55.5	39	56	112			
	19025-06-P	●	19	25	38	57.4	41	56	114			
	19525-06-P*	●	19.5	25	38	57.4	41	56	114			
	20025-07-P	●	20	25	40	61.5	43	56	118			
	20525-07-P	●	20.5	25	40	61.4	43	56	118			
	21025-07-P*	●	21	25	42	63.4	45	56	120			
	21525-07-P	●	21.5	25	42	63.4	45	56	120			
	22025-07-P	●	22	25	44	65.4	47	56	122			
	22525-07-P	●	22.5	25	44	65.3	47	56	122			
	23025-07-P	●	23	25	46	69.3	49	56	126			
	23525-07-P	●	23.5	25	46	69.3	49	56	126			
	24032-09-P*	●	24	32	48	72.4	51	60	133			
	24532-09-P	●	24.5	32	48	72.4	51	60	133			
	25032-09-P	●	25	32	50	74.3	53	60	135			
	25532-09-P	●	25.5	32	50	74.3	53	60	135			
	26032-09-P	●	26	32	52	76.3	55	60	137			
	26532-09-P*	●	26.5	32	52	76.3	55	60	137			
	27032-09-P	●	27	32	54	79.2	57	60	140			
	27532-09-P	●	27.5	32	54	79.2	57	60	140			
	28032-09-P	●	28	32	56	82.2	59	60	143			
	28532-09-P	●	28.5	32	56	82.2	59	60	143			
	29032-09-P	●	29	32	58	84.1	61	60	145			
29532-09-P*	●	29.5	32	58	84.1	61	60	145				
30032-11-P	●	30	32	60	89	63	60	150				
30532-11-P		30.5	32	60	89	63	60	150				
31032-11-P	●	31	32	62	91	65	60	152				
31532-11-P		31.5	32	62	91	65	60	152				
32032-11-P*	●	32	32	64	93	67	60	154				
32532-11-P		32.5	32	64	93	67	60	154				
33032-11-P	●	33	32	66	96	69	60	157				
33532-11-P		33.5	32	66	96	69	60	157				
34032-11-P	●	34	32	68	98	71	60	159				
34532-11-P		34.5	32	68	97.9	71	60	159				
35032-11-P*	●	35	32	70	99.9	73	60	161				
35532-11-P		35.5	32	70	99.9	73	60	161				
									1/4	SP□T090308-□□ XO□T090305-□□	FTKA0307 TW09S	
										SP□T11T308-□□ XO□T11T306-□□	FTKA03508 TW15S	

적용인서트 D9 ~ D10

*는 Tap 기초홀 가공용으로 사용가능함(참조 D7page)

KED Plus Drill(2D)

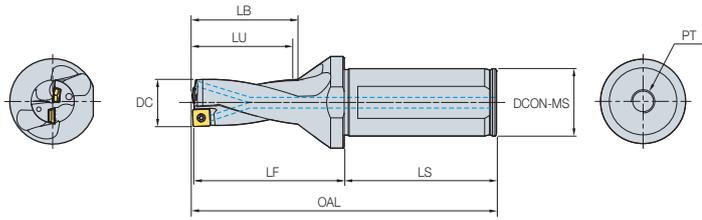

												(mm)	
형 번	재고	DC	DCON-MS	LU	LF	LB	LS	OAL	PT	적용인서트	스crew	렌치	
E2D-	36040-13-P	●	36	40	72	105.1	76	70	176	1/4	SP□T130410-□□ XO□T130406-□□	FTKA0410 TW15S	
	36540-13-P		36.5	40	72	105	76	70	176				
	37040-13-P	●	37	40	74	107	78	70	178				
	37540-13-P*		37.5	40	74	107	78	70	178				
	38040-13-P	●	38	40	76	109.9	80	70	181				
	38540-13-P		38.5	40	76	109.9	80	70	181				
	39040-13-P	●	39	40	78	111.9	82	70	183				
	39540-13-P		39.5	40	78	111.9	82	70	183				
	40040-13-P	●	40	40	80	114.8	84	70	186				
	40540-13-P		40.5	40	80	114.8	84	70	186				
	41040-13-P	●	41	40	82	116.8	86	70	188				
	41540-13-P		41.5	40	82	116.8	86	70	188				
	42040-13-P	●	42	40	84	119.7	88	70	191				
	42540-13-P		42.5	40	84	119.7	88	70	191				
	43040-15-P	●	43	40	86	124.8	91	70	196				
	43540-15-P		43.5	40	86	124.8	91	70	196				
	44040-15-P	●	44	40	88	126.8	93	70	198				
	44540-15-P		44.5	40	88	126.7	93	70	198				
	45040-15-P	●	45	40	90	129.7	95	70	201				
	45540-15-P		45.5	40	90	129.7	95	70	201				
	46040-15-P	●	46	40	92	131.7	97	70	203				
	46540-15-P		46.5	40	92	131.6	97	70	203				
	47040-15-P	●	47	40	94	134.6	99	70	206				
	47540-15-P		47.5	40	94	134.6	99	70	206				
	48040-15-P	●	48	40	96	136.6	101	70	208				
	48540-15-P		48.5	40	96	136.5	101	70	208				
	49040-15-P	●	49	40	98	138.5	103	70	210				
	49540-15-P		49.5	40	98	138.5	103	70	210				
	50040-15-P	●	50	40	100	140.5	105	70	212				
	50540-15-P		50.5	40	100	140.5	105	70	212				
	51040-18-P	●	51	40	102	146.6	108	70	218				
	51540-18-P		51.5	40	102	146.6	108	70	218				
52040-18-P	●	52	40	104	148.6	110	70	220					
52540-18-P		52.5	40	104	148.5	110	70	220					
53040-18-P	●	53	40	106	150.5	112	70	222					
53540-18-P		53.5	40	106	150.5	112	70	222					
54040-18-P	●	54	40	108	152.4	114	70	224					
54540-18-P		54.5	40	108	152.4	114	70	224					
55040-18-P	●	55	40	110	154.4	116	70	226					
55540-18-P		55.5	40	110	154.4	116	70	226					
56040-18-P	●	56	40	112	158.3	118	70	230					
56540-18-P		56.5	40	112	158.3	118	70	230					
57040-18-P	●	57	40	114	161.3	121	70	233					
57540-18-P		57.5	40	114	161.3	121	70	233					
58040-18-P	●	58	40	116	164.2	124	70	236					
58540-18-P		58.5	40	116	164.2	124	70	236					
59040-18-P	●	59	40	118	167.2	127	70	239					
59540-18-P		59.5	40	118	167.2	127	70	239					
60040-18-P	●	60	40	120	170.2	130	70	242					
60540-18-P		60.5	40	120	170.2	130	70	242					
											SP□T180510-□□ XO□T180508-□□	FTNA0511 TW20-100	

➔ 적용인서트 D9 ~ D10

*는 Tap 기초홀 가공용으로 사용가능함(참조 D7page)