


KED Plus Drill(3D)

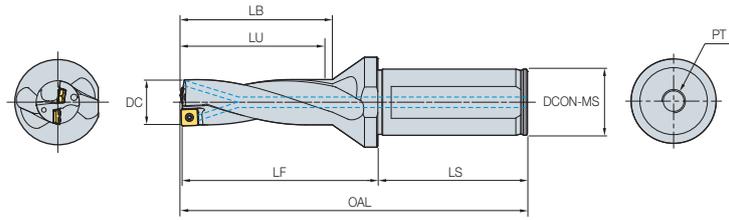


										(mm)		
형번	재고	DC	DCON-MS	LU	LF	LB	LS	OAL	PT	적용인서트	스크류	렌치
E3D-	12020-04-P*	●	12	20	36	52.71	39	50	103	1/8	SP□T040204-□□ XO□T040204-□□	FTNA0204 TW06P
	12520-04-P		12.5	20	36	52.71	39	50	103			
	13020-04-P	●	13	20	39	55.71	42	50	106			
	13520-04-P*	●	13.5	20	39	55.71	42	50	106			
	14020-05-P*	●	14	20	42	59.6	45	50	110			
	14520-05-P*	●	14.5	20	42	59.6	45	50	110			
	15020-05-P	●	15	20	45	63.6	48	50	114			
	15520-05-P*	●	15.5	20	45	63.5	48	50	114			
	16020-05-P	●	16	20	48	66.5	51	50	117			
	16525-06-P*	●	16.5	25	48	66.6	51	56	123			
	17025-06-P	●	17	25	51	69.6	54	56	126			
	17525-06-P*	●	17.5	25	51	69.5	54	56	126			
	18025-06-P	●	18	25	54	73.5	57	56	130			
	18525-06-P	●	18.5	25	54	73.5	57	56	130			
	19025-06-P	●	19	25	57	76.4	60	56	133			
	19525-06-P*	●	19.5	25	57	76.4	60	56	133			
	20025-07-P	●	20	25	60	81.5	63	56	138			
	20525-07-P	●	20.5	25	60	81.4	63	56	138			
	21025-07-P*	●	21	25	63	84.4	66	56	141			
	21525-07-P	●	21.5	25	63	84.4	66	56	141			
	22025-07-P	●	22	25	66	87.4	69	56	144			
	22525-07-P	●	22.5	25	66	87.3	69	56	144			
	23025-07-P	●	23	25	69	92.3	72	56	149			
	23525-07-P	●	23.5	25	69	92.3	72	56	149			
	24032-09-P*	●	24	32	72	96.4	75	60	157			
	24532-09-P	●	24.5	32	72	96.4	75	60	157			
	25032-09-P	●	25	32	75	99.3	78	60	160			
	25532-09-P	●	25.5	32	75	99.3	78	60	160			
	26032-09-P	●	26	32	78	102.3	81	60	163			
	26532-09-P*	●	26.5	32	78	102.3	81	60	163			
	27032-09-P	●	27	32	81	106.2	84	60	167			
	27532-09-P	●	27.5	32	81	106.2	84	60	167			
	28032-09-P	●	28	32	84	110.2	87	60	171			
	28532-09-P	●	28.5	32	84	110.2	87	60	171			
	29032-09-P	●	29	32	87	113.1	90	60	174			
29532-09-P*	●	29.5	32	87	113.1	90	60	174				
30032-11-P	●	30	32	90	119	93	60	180				
30532-11-P		30.5	32	90	119	93	60	180				
31032-11-P	●	31	32	93	122	96	60	183				
31532-11-P		31.5	32	93	122	96	60	183				
32032-11-P*	●	32	32	96	125	99	60	186				
32532-11-P		32.5	32	96	125	99	60	186				
33032-11-P	●	33	32	99	129	102	60	190				
33532-11-P		33.5	32	99	129	102	60	190				
34032-11-P	●	34	32	102	132	105	60	193				
34532-11-P		34.5	32	102	131.9	105	60	193				
35032-11-P*	●	35	32	105	134.9	108	60	196				
35532-11-P		35.5	32	105	134.9	108	60	196				
									1/4	SP□T090308-□□ XO□T090305-□□	FTKA0307 TW09S	
										SP□T11T308-□□ XO□T11T306-□□	FTKA03508 TW15S	

적용인서트 D9 ~ D10

*는 Tap 기초홀 가공용으로 사용가능함(참조 D7page)

KED Plus Drill(3D)

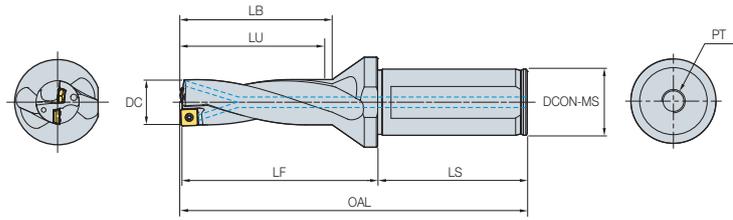

												(mm)	
형 번	재고	DC	DCON-MS	LU	LF	LB	LS	OAL	PT	적용인서트	스크류	렌치	
E3D-	36040-13-P	●	36	40	108	141.1	112	70	212	1/4	SP□T130410-□□ XO□T130406-□□	FTKA0410 TW15S	
	36540-13-P		36.5	40	108	141	112	70	212				
	37040-13-P	●	37	40	111	144	115	70	215				
	37540-13-P*		37.5	40	111	144	115	70	215				
	38040-13-P	●	38	40	114	147.9	118	70	219				
	38540-13-P		38.5	40	114	147.9	118	70	219				
	39040-13-P	●	39	40	117	150.9	121	70	222				
	39540-13-P		39.5	40	117	150.9	121	70	222				
	40040-13-P	●	40	40	120	154.8	124	70	226				
	40540-13-P		40.5	40	120	154.8	124	70	226				
	41040-13-P	●	41	40	123	157.8	127	70	229				
	41540-13-P		41.5	40	123	157.8	127	70	229				
	42040-13-P	●	42	40	126	161.7	130	70	233				
	42540-13-P		42.5	40	126	161.7	130	70	233				
	43040-15-P	●	43	40	129	167.8	134	70	239				
	43540-15-P		43.5	40	129	167.8	134	70	239				
	44040-15-P	●	44	40	132	170.8	137	70	242				
	44540-15-P		44.5	40	132	170.7	137	70	242				
	45040-15-P	●	45	40	135	174.7	140	70	246				
	45540-15-P		45.5	40	135	174.7	140	70	246				
	46040-15-P	●	46	40	138	177.7	143	70	249				
	46540-15-P		46.5	40	138	177.6	143	70	249				
	47040-15-P	●	47	40	141	181.6	146	70	253				
	47540-15-P		47.5	40	141	181.6	146	70	253				
	48040-15-P	●	48	40	144	184.6	149	70	256				
	48540-15-P		48.5	40	144	184.5	149	70	256				
	49040-15-P	●	49	40	147	187.5	152	70	259				
	49540-15-P		49.5	40	147	187.5	152	70	259				
	50040-15-P	●	50	40	150	190.5	155	70	262				
	50540-15-P		50.5	40	150	190.5	155	70	262				
	51040-18-P	●	51	40	153	197.6	159	70	269				
	51540-18-P		51.5	40	153	197.6	159	70	269				
	52040-18-P	●	52	40	156	200.6	162	70	272				
	52540-18-P		52.5	40	156	200.5	162	70	272				
	53040-18-P	●	53	40	159	203.5	165	70	275				
	53540-18-P		53.5	40	159	203.5	165	70	275				
54040-18-P	●	54	40	162	206.4	168	70	278					
54540-18-P		54.5	40	162	206.4	168	70	278					
55040-18-P	●	55	40	165	209.4	171	70	281					
55540-18-P		55.5	40	165	209.4	171	70	281					
56040-18-P	●	56	40	168	214.3	174	70	286					
56540-18-P		56.5	40	168	214.3	174	70	286					
57040-18-P	●	57	40	171	218.3	178	70	290					
57540-18-P		57.5	40	171	218.3	178	70	290					
58040-18-P	●	58	40	174	222.2	182	70	294					
58540-18-P		58.5	40	174	222.2	182	70	294					
59040-18-P	●	59	40	177	226.2	186	70	298					
59540-18-P		59.5	40	177	226.2	186	70	298					
60040-18-P	●	60	40	180	230.2	190	70	302					
60540-18-P		60.5	40	180	230.2	190	70	302					

적용인서트 D9 ~ D10

*는 Tap 기초홀 가공용으로 사용가능함(참조 D7page)