

TPDC(1.5D/3D)

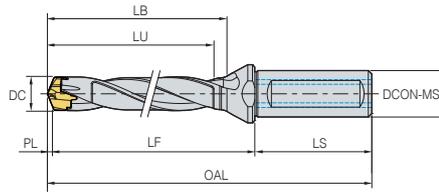


그림 1

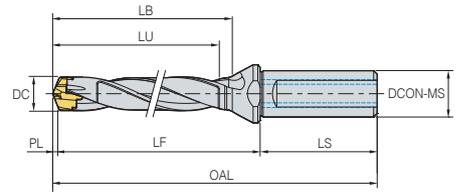


그림 2

											(mm)
형 번	재고	DC	DCON-MS	LU	LF	LB	LS	OAL	적용인서트	그림	
TPDC	1.5D-12016-18	●	12	16	19.89	35.01	25.9	48	84.9	TPD1200C□-1249C□	1
	1.5D-12516-19	●	12.5	16	20.72	35.93	26.9	48	85.9	TPD1250C□-1299C□	1
	1.5D-13016-20	●	13	16	21.55	37.05	28.1	48	87.1	TPD1300C□-1349C□	1
	1.5D-13516-20	●	13.5	16	22.38	37.97	29.1	48	88.1	TPD1350C□-1399C□	1
	1.5D-14016-21	●	14	16	23.21	40.99	32.2	48	93.2	TPD1400C□-1449C□	1
	1.5D-14516-22	●	14.5	16	24.04	41.91	33.2	48	94.2	TPD1450C□-1499C□	1
	1.5D-15020-23	●	15	20	24.86	43.04	32.3	50	95.4	TPD1500C□-1599C□	2
	1.5D-16020-24	●	16	20	26.52	45.08	34.5	50	97.6	TPD1600C□-1699C□	2
	1.5D-17020-26	●	17	20	28.18	47.02	36.6	50	99.7	TPD1700C□-1799C□	2
	1.5D-18025-27	●	18	25	29.84	51.06	38.8	56	109.9	TPD1800C□-1899C□	2
	1.5D-19025-28	●	19	25	31.5	53	40.9	56	112	TPD1900C□-1999C□	2
	1.5D-20025-30	●	20	25	33.15	55.05	43.1	56	114.2	TPD2000C□-2099C□	2
	1.5D-21025-31	●	21	25	34.81	57.09	45.3	56	116.4	TPD2100C□-2199C□	2
	1.5D-22025-33	●	22	25	35.84	59.66	47.4	56	118.5	TPD2200C□-2299C□	2
	1.5D-23025-34	●	23	25	37.47	61.73	49.6	56	120.7	TPD2300C□-2399C□	2
	1.5D-24032-36	●	24	32	39.1	66.7	51.7	60	129.8	TPD2400C□-2499C□	2
	1.5D-25032-37	●	25	32	41.5	68	53.9	60	132	TPD2500C□-2599C□	2
	1.5D-26032-39	●	26	32	43.16	70.04	56.1	60	134.2	TPD2600C□-2699C□	2
	1.5D-27032-40	●	27	32	44.82	71.98	58.2	60	136.3	TPD2700C□-2799C□	2
	1.5D-28032-42	●	28	32	46.48	73.92	60.3	60	138.4	TPD2800C□-2899C□	2
	1.5D-29032-43	●	29	32	48.14	76.06	62.6	60	140.7	TPD2900C□-2999C□	2
	1.5D-30032-45	●	30	32	49.8	78	64.7	60	142.8	TPD3000C□-3099C□	2
	3D-12016-36	●	12	16	37.89	49	39.9	48	98.9	TPD1200C□-1249C□	1
	3D-12516-38	●	12.5	16	39.47	50.9	41.9	48	100.9	TPD1250C□-1299C□	1
	3D-13016-39	●	13	16	41.05	53.1	44.1	48	103.1	TPD1300C□-1349C□	1
	3D-13516-41	●	13.5	16	42.63	54	45.1	48	104.1	TPD1350C□-1399C□	1
	3D-14016-42	●	14	16	44.21	56	47.2	48	106.2	TPD1400C□-1449C□	1
	3D-14516-44	●	14.5	16	45.79	56.9	48.2	48	107.2	TPD1450C□-1499C□	1
	3D-15020-45	●	15	20	47.36	61	50.4	50	113.4	TPD1500C□-1599C□	2
	3D-16020-48	●	16	20	50.52	64	53.5	50	116.5	TPD1600C□-1699C□	2
	3D-17020-51	●	17	20	53.68	67	56.7	50	119.7	TPD1700C□-1799C□	2
	3D-18025-54	●	18	25	56.84	73.1	60.9	56	131.9	TPD1800C□-1899C□	2
	3D-19025-57	●	19	25	60	76	64	56	135	TPD1900C□-1999C□	2
3D-20025-60	●	20	25	63.15	79.1	67.2	56	138.2	TPD2000C□-2099C□	2	
3D-21025-63	●	21	25	66.31	82.1	70.4	56	141.4	TPD2100C□-2199C□	2	
3D-22025-66	●	22	25	68.84	85.7	73.5	56	144.5	TPD2200C□-2299C□	2	
3D-23025-69	●	23	25	71.97	89.7	77.7	56	148.7	TPD2300C□-2399C□	2	
3D-24032-72	●	24	32	75.1	95.7	80.8	60	158.8	TPD2400C□-2499C□	2	
3D-25032-75	●	25	32	79	98	84	60	162	TPD2500C□-2599C□	2	
3D-26032-78	●	26	32	82.16	109	95.2	60	173.2	TPD2600C□-2699C□	2	
3D-27032-81	●	27	32	85.32	112	98.3	60	176.3	TPD2700C□-2799C□	2	
3D-28032-84	●	28	32	88.48	115.9	102.4	60	180.4	TPD2800C□-2899C□	2	
3D-29032-87	●	29	32	91.64	120.1	106.7	60	184.7	TPD2900C□-2999C□	2	
3D-30032-90	●	30	32	94.8	123	109.8	60	187.8	TPD3000C□-3099C□	2	

적용인서트 D47~D48

* 재고관리 외 제품은 주문제작 가능 (예)Ø10, 가공깊이 약 60mm → TPDX6D-10016-60