


DRE4000

레디우스



				DC Ø0.2 ~ Ø4 Ø6 ~ Ø12	공구직경공차 0.000 ~ -0.020 0.000 ~ -0.030
--	--	--	--	------------------------------------	---

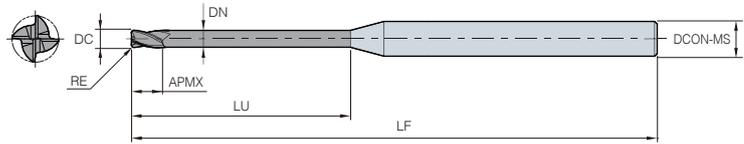

(mm)

형 번	DC	DCON-MS	APMX	LU	LF	RE	DN
DRE 4020-060-N120S04-R03	2	4	3.5	12	60	0.3	-
4020-060-N180S04-R02	2	4	3.5	18	60	0.2	-
4020-060-N180S04-R03	2	4	3.5	18	60	0.3	-
4020-060-N250S04-R02	2	4	3.5	25	60	0.2	-
4020-060-N250S04-R03	2	4	3.5	25	60	0.3	-
4020-060-N300S04-R02	2	4	3.5	30	60	0.2	-
4020-060-N300S04-R03	2	4	3.5	30	60	0.3	-
4030-080-N100S04-R05	3	4	4	10	80	0.5	-
4030-080-N200S04-R03	3	4	4	20	80	0.3	-
4030-080-N200S04-R05	3	4	4	20	80	0.5	-
4030-080-N300S04-R03	3	4	4	30	80	0.3	-
4030-080-N300S04-R05	3	4	4	30	80	0.5	-
4030-080-N400S04-R03	3	4	4	40	80	0.3	-
4030-080-N400S04-R05	3	4	4	40	80	0.5	-
4040-100-N200S04-R03	4	4	6	20	100	0.3	-
4060-110-N250S06-R03	6	6	9	25	110	0.3	-
4060-110-N250S06-R05	6	6	9	25	110	0.5	-
4060-150-N300S06-R05	6	6	9	30	150	0.5	-
4080-110-N300S08-R03	8	8	12	30	110	0.3	-
4080-110-N300S08-R05	8	8	12	30	110	0.5	-
4080-150-N400S08-R05	8	8	12	40	150	0.5	-
4100-110-N350S10-R05	10	10	15	35	110	0.5	-
4100-160-N450S10-R05	10	10	15	45	160	0.5	-
4120-110-N400S12-R05	12	12	18	40	110	0.5	-
4120-160-N450S12-R05	12	12	18	45	160	0.5	-