
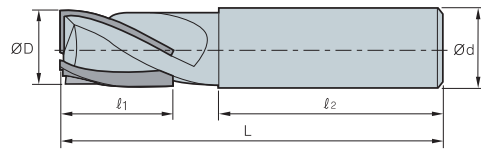


ZSE200/300(플랫)



ØD	가공직경공차
전형번	0.00 ~ - 0.05

(mm)

형 번		ØD	Ød	ℓ ₁	ℓ ₂	L
ZSE 2	214	14	16	28	57	95
	215	15	16	28	57	95
	216(Q)	16	16	28	55	95
	217	17	20	30	70	115
	218	18	20	30	70	115
	219	19	20	30	70	115
	220(Q)	20	20	30	70	115
	221	21	20	35	65	115
	222	22	20	35	65	115
	223	23	25	35	75	125
	224	24	25	35	75	125
	225	25	25	35	75	125
	226(Q)	26	25	35	75	125
	227	27	25	35	75	125
	228	28	25	35	75	125
	229	29	32	40	95	150
	230(Q)	30	32	40	95	150
	231	31	32	40	95	150
	232	32	32	45	90	150
	233	33	32	45	90	150
	234	34	32	50	85	150
	235	35	32	50	85	150
	236	36	32	50	85	150
	237	37	32	55	80	150
	238	38	32	55	80	150
	238S	38	42	55	80	150
	240(Q)	40	32	60	75	150
	240S	40	42	60	75	150
	242	42	32	60	75	150
	244	44	32	65	80	160
	245	45	32	65	80	160
	245S	45	42	65	80	160
	247	47	32	65	80	160
	248	48	32	65	80	160
	248S	48	42	65	80	160
	250	50	32	65	80	160
	250S	50	42	65	80	160
ZSE 3	314	14	16	28	57	95
	315	15	16	28	57	95
	316	16	16	28	55	95
	317	17	20	30	70	115
	318	18	20	30	70	115
	319	19	20	30	70	115
	320	20	20	30	70	115
	322	22	20	35	65	115
	325	25	25	35	75	125
	326	26	25	35	75	125
	328	28	25	35	75	125
	330	30	32	40	95	150
	331	31	32	40	95	150



이형품 의뢰 시 식별법 : ZSE○○○○○ 인장-전장 L

예.1) 2날, 공구직경 : 6.3, 인장 : 10, 전장 : 60 ZSBE206310-60L

예.2) 2날, 공구직경 : 6.3, 표준형 ZSBE2063



ZSE300/400/600(플랫)

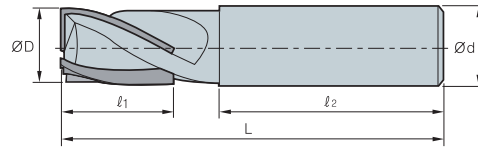

ØD	가공직경공차
전형번	0.00 ~ - 0.05

(mm)

형 번	ØD	Ød	l ₁	l ₂	L
ZSE					
3 332	32	32	45	90	150
333	33	32	45	90	150
334	34	32	50	85	150
335	35	32	50	85	150
338	38	32	55	80	150
338S	38	42	55	80	150
340	40	32	60	75	150
340S	40	42	60	75	150
342	42	32	60	75	150
345	45	32	65	80	160
345S	45	42	65	80	160
350	50	32	65	80	160
350S	50	42	65	80	160
ZSE					
4 414	14	16	28	57	95
415	15	16	28	57	95
416(Q)	16	16	28	55	95
417	17	20	30	70	115
418	18	20	30	70	115
419	19	20	30	70	115
420(Q)	20	20	30	70	115
421	21	20	35	65	115
422	22	20	35	65	115
423	23	25	35	75	125
424	24	25	35	75	125
425(Q)	25	25	35	75	125
426	26	25	35	75	125
427	27	25	35	75	125
428	28	25	35	75	125
429	29	32	40	95	150
430	30	32	40	95	150
432(Q)	32	32	45	90	150
435	35	32	50	80	150
438	38	32	55	85	150
438S	38	42	55	85	150
440(Q)	40	32	60	75	150
440S	40	42	60	75	150
445	45	32	65	80	160
445S	45	42	65	80	160
450	50	32	65	80	160
450S	50	42	65	80	160
ZSE					
6 634	34	32	50	85	150
635	35	32	50	85	150
638	38	32	55	80	150
638S	38	42	55	80	150
640	40	32	60	75	150
640S	40	42	60	75	150
645	45	32	65	80	160
645S	45	42	65	80	160
650	50	32	65	80	160
650S	50	42	65	80	160

이형품 의뢰 시 식별법 : ZSE○○○○ 인장-전장 L

예.1) 2날, 공구직경:6.3, 인장:10, 전장:60 ZSBE206310-60L

예.2) 2날, 공구직경:6.3, 표준형 ZSBE2063

