



단면 사각 흡가공 HPC

※ HPC: High pressure coolant(고압쿨러트)


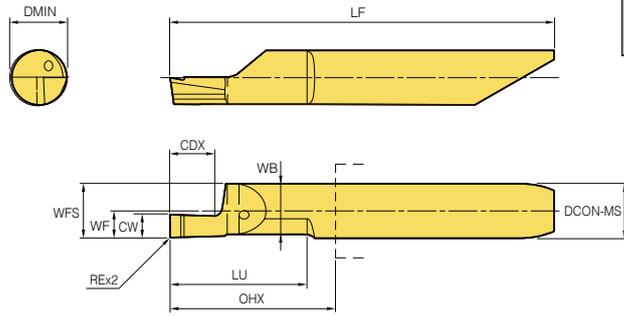


내경용

형 번	최소가공경 DMIN	치수(mm)									DCON-MS
		CW±0.025	CDX	LU	WF	RE	WFS	WB	OHX	LF	
MFGR/L 680L15C-W100	8	1	2	15	2.8	0.1	5.8	5.55	18.3	42	6
680L15C-W117		1.17	2	15	2.8	0.15	5.8	5.55	18.3	42	
680L15C-W150		1.5	3	15	2.8	0.1	5.8	5.55	18.3	42	
680L15C-W157		1.57	3	15	2.8	0.15	5.8	5.55	18.3	42	
680L15C-W198		1.98	4	15	2.8	0.15	5.8	5.55	18.3	42	
680L15C-W200		2	4	15	2.8	0.1	5.8	5.55	18.3	42	
680L15C-W239		2.39	5	15	2.8	0.15	5.8	5.55	18.3	42	
680L15C-W250		2.5	5	15	2.8	0.1	5.8	5.55	18.3	42	
680L15C-W300		3	6	15	2.8	0.1	5.8	5.55	18.3	42	
680L15C-W318		3.18	6	15	2.8	0.15	5.8	5.55	18.3	42	

단면 사각 흡가공 HPC

※ HPC: High pressure coolant(고압쿨러트)

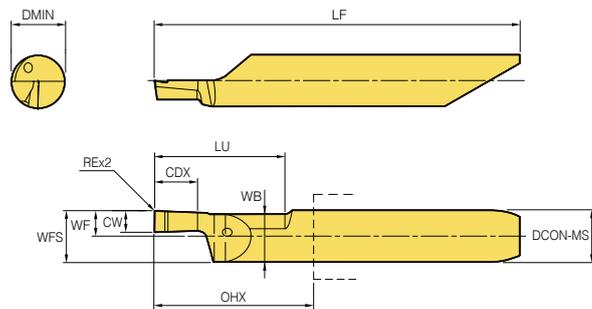

외경용

형 번	최소가공경 DMIN	치수(mm)									DCON-MS
		CW±0.025	CDX	LU	WF	RE	WFS	WB	OHX	LF	
MFPR/L 680L15C-W100	8	1	2	15	2.8	0.1	5.8	5.55	18.3	42	6.0
680L15C-W117		1.17	2	15	2.8	0.15	5.8	5.55	18.3	42	
680L15C-W150		1.5	3	15	2.8	0.1	5.8	5.55	18.3	42	
680L15C-W157		1.57	3	15	2.8	0.15	5.8	5.55	18.3	42	
680L15C-W198		1.98	4	15	2.8	0.15	5.8	5.55	18.3	42	
680L15C-W200		2	4	15	2.8	0.1	5.8	5.55	18.3	42	
680L15C-W239		2.39	5	15	2.8	0.15	5.8	5.55	18.3	42	
680L15C-W250		2.5	5	15	2.8	0.1	5.8	5.55	18.3	42	
680L15C-W300		3	6	15	2.8	0.1	5.8	5.55	18.3	42	
680L15C-W318		3.18	6	15	2.8	0.15	5.8	5.55	18.3	42	