



S-SDC/S

Straight Shank Collet Chuck Slim Type_슬림 콜릿척 스트레이트 타입



- Ø16 Max Dia
- C Coolant System
- ER ER Collet
- Milling
- Drilling
- Tapping
- Chamfering

Fig.1


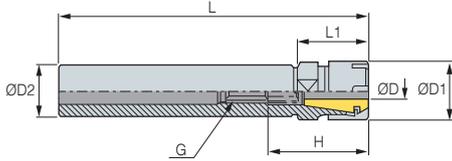


Fig.2

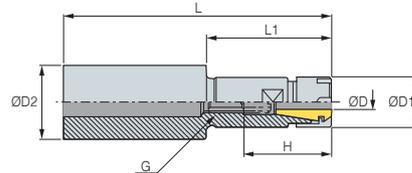

- 표시 : 재고관리품
- H : 공구 삽입 깊이

☐ 내부 콜릿 시스템은 옵션 탑재가 가능합니다.

· 적용 가능 콜릿은 **98P** 를 참고하세요.

	형번	ØD	L	ØD1	ØD2	L1	H	Collet/Step	G	kg	포장 무게(kg)	Stock
S16	S16-SDC7S-100M	1.0~7.0	100	16	16	21	33	GERC11/0.5	M7	0.1	0.2	●
	S16-SDC7S-150M	1.0~7.0	150	16	16	21	33	GERC11/0.5	M7	0.1	0.2	●
	S16-SDC10S-100M	1.0~10.0	100	22	16	50	4.5	GERC16/1.0	M10	0.1	0.2	●
	S16-SDC10S-150M	1.0~10.0	150	22	16	50	4.5	GERC16/1.0	M10	0.1	0.2	●
S20	S20-SDC7S-100M	1.0~7.0	100	16	20	30	35	GERC11/0.5	M7	0.1	0.2	●
	S20-SDC7S-150M	1.0~7.0	150	16	20	80	35	GERC11/0.5	M7	0.2	0.3	●
	S20-SDC10S-100M	1.0~10.0	100	22	20	50	4.5	GERC16/1.0	M10	0.1	0.2	●
	S20-SDC10S-150M	1.0~10.0	150	22	20	50	4.5	GERC16/1.0	M10	0.2	0.3	●
	S20-SDC10S-200M	1.0~10.0	200	22	20	50	4.5	GERC16/1.0	M10	0.3	0.4	●
	S20-SDC13S-100M	1.0~13.0	100	28	20	50	49	GERC20/1.0	M13	0.1	0.2	●
S25	S25-SDC7S-100M	1.0~7.0	100	16	25	30	33	GERC11/0.5	M7	0.2	0.3	●
	S25-SDC7S-150M	1.0~7.0	150	16	25	80	33	GERC11/0.5	M7	0.2	0.3	●
	S25-SDC10S-100M	1.0~10.0	100	22	25	30	4.5	GERC16/1.0	M10	0.2	0.3	●
	S25-SDC10S-150M	1.0~10.0	150	22	25	80	4.5	GERC16/1.0	M10	0.3	0.4	●
	S25-SDC13S-100M	1.0~13.0	100	28	25	50	49	GERC20/1.0	M13	0.2	0.3	●
	S25-SDC13S-150M	1.0~13.0	150	28	25	50	49	GERC20/1.0	M13	0.4	0.5	●
	S25-SDC16S-100M	2.0~16.0	100	35	25	50	50	GERC25/1.0	M18	0.3	0.4	●
	S25-SDC16S-150M	2.0~16.0	150	35	25	50	50	GERC25/1.0	M18	0.4	0.5	●
S32	S32-SDC16S-120M	2.0~16.0	120	35	32	50	50	GERC25/1.0	M18	0.5	0.6	●
	S32-SDC16S-150M	2.0~16.0	150	35	32	50	50	GERC25/1.0	M18	0.6	0.7	●

(단위 : mm)

Spare Part	타입	기본 구성품		
		너트	스패너	GERC/ER
	이미지			
형번				
	S-SDC7S	R11M	M11M	GERC11/ER11-ØD
	S-SDC10S	R16M	M16M	GERC16/ER16-ØD
	S-SDC13S	R20M	M20M	GERC20/ER20-ØD
	S-SDC16S	R25M	M25M	GERC25/ER25-ØD