





적용인서트

형상	형번	코팅								초경	치수(mm)					형상도면	적용 제품 페이지
		NC5330	NCM535	PC3700	PC6100	PC9530	PC9540	PC5335	PC5300		IC	S	RE	AN	CEDC		
 WCMT-C20N	030208-C20N							●			5.56	2.38	0.8	7	3		
	040208-C20N							●			6.35	2.38	0.8	7	3		
	050308-C20N	●						●			7.94	3.18	0.8	7	3		
	06T308-C20N	●						●			9.525	3.97	0.8	7	3		
	080408-C20N							●			12.7	4.76	0.8	7	3		
	080412-C20N	●						●			12.7	4.76	1.2	7	3		
 WCMT-C21N	030204-C21N							●			5.56	2.38	0.4	7	3		G81 ~ G83
	040204-C21N							●			6.35	2.38	0.4	7	3		
	040208-C21N							●			6.35	2.38	0.8	7	3		
	050308-C21N							●			7.94	3.18	0.8	7	3		
	06T308-C21N							●			9.525	3.97	0.8	7	3		
	080408-C21N							●			12.7	4.76	0.8	7	3		


적용홀더 D83~D84

● : 재고 관리 형번

WPDC(5D/6.5D/8D)



표준타입

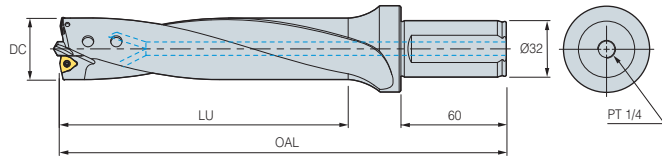

										(mm)
형 번		DC	5D		6.5D		8D		인서트	센터 드릴
			LU	OAL	LU	OAL	LU	OAL		
WPDC	250-32-□	25	150	240	185	275	220	310	WC□T030204-C21N	CD0630
	260-32-□	26	150	240	185	275	220	310	WC□T040204-C21N	
	270-32-□	27	150	240	185	275	220	310		
	280-32-□	28	150	240	185	275	220	310		
	290-32-□	29	150	240	185	275	220	310		
	300-32-□	30	150	240	185	275	220	310		
	310-32-□	31	175	265	218	308	260	350	WC□T050308-C21N	CD0835
	320-32-□	32	175	265	218	308	260	350		
	330-32-□	33	175	265	218	308	260	350		
	340-32-□	34	175	265	218	308	260	350		
	350-32-□	35	175	265	218	308	260	350		
	360-32-□	36	200	290	250	340	300	390		
	370-32-□	37	200	290	250	340	300	390		
	380-32-□	38	200	290	250	340	300	390		
	390-32-□	39	200	290	250	340	300	390		
	400-32-□	40	200	290	250	340	300	390		

적용인서트 D83

* 필요시 드릴직경을 지정하여 주문하시면 원하는 직경으로 제작 공급
예) 드릴직경 32.5mm×6.5D → WPDC325-32-6.5